


PRODUCT INFORMATION SHEET

STAIR NOSING – COVER STRIPS – ANTI SLIP TAPE

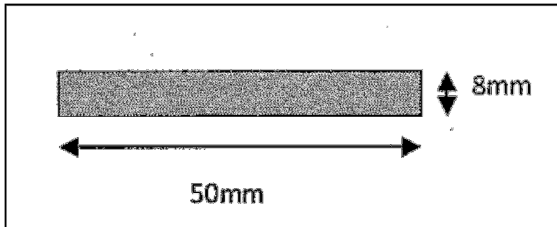

SC-R 508 inlay is suitable for installation in pre-grooved timber or concrete stairs. The SC-R 508 inlay can also be used as a lead in edge. SC-R is a composite material with hard wearing silicon carbide anti slip grit. The inlay is 50mm wide x 8mm thick and is available in black. The material is suitable for high exposure to salt water and offers high resistance to chemicals such as acid, alkali and solvent liquid. SC-R 508 inlays are supplied cut to size in maximum 4 meter lengths. SC-R 508 strip complies with the requirements of AS1428.1:2009 Design for Access and Mobility.

Installation – Grooved Step

The groove in the stair can be set back at a maximum of 15mm from the front edge of the step. The groove should be 52mm wide x 8mm deep. SCR 508 inlay is glued into the groove using a polyurethane based adhesive. (typical glues are: Sikaflex 11FC, Sikaflex 291 Marine Grade, Bostik-Simson ISR 70-05 or any other similar adhesive).

